




m7 sospensione UpO 2000



corpo illuminante sospeso per interni IP20 composto da un box verniciato nero e una piastra verniciata bianca, nera, in alluminio lucido o in cartongesso (990x990mm). all'interno del box sono contenuti i cablaggi, disponibili in tre versioni: ioduri metallici RX7s 2x70W, lampade alogene lineari R7s-114 2x300W e lampade fluo 2G11 4x55W. è completo di cavo di alimentazione, lunghezza 3000mm, ricoperto in tessuto rosso. m7 sospensione contiene inoltre due binari 12V che permettono l'installazione di max 3 kit diroici orientabili GU5,3 da 50W o led GU5,3. su richiesta é disponibile il rosone.

suspended lighting fixture for interior use IP20 consisting of a black painted box and a white or black painted, polished aluminium or plasterboard plate(990x990mm). the wiring contained in the box is available in three different versions: for Rx7s 2x70W metal halide lamps, or R7s-114 2x300W linear halogen lamps, or 2G11 4x55W fluo lamps. complete with power cable in red fabric (l. 3000mm). m7 sospensione also contains two 12V tracks which allow the installation of max 3 GU5,3 50W adjustable dichroic kits or GU5,3 led kits. on request a canopy is available.





m7 sospensione 240V 50-60Hz IP20

F8.007.01 nero black RX7s 2x70W ECG 9,4

F8.007.03 nero black R7s-114 2x300W 9,0



***F8.007.04** nero black 2G11+ GU5,3 4x55W dimm. dali ECG 9,4
+ 2x50W

*n. 2 faretto inclusi
2 no. spotlights included


kit 12V

F6.007.03 kit dicro nero GU5,3 50W 0,4
kit dicro black


non utilizzabile con F8.007.04
not to be used with F8.007.04

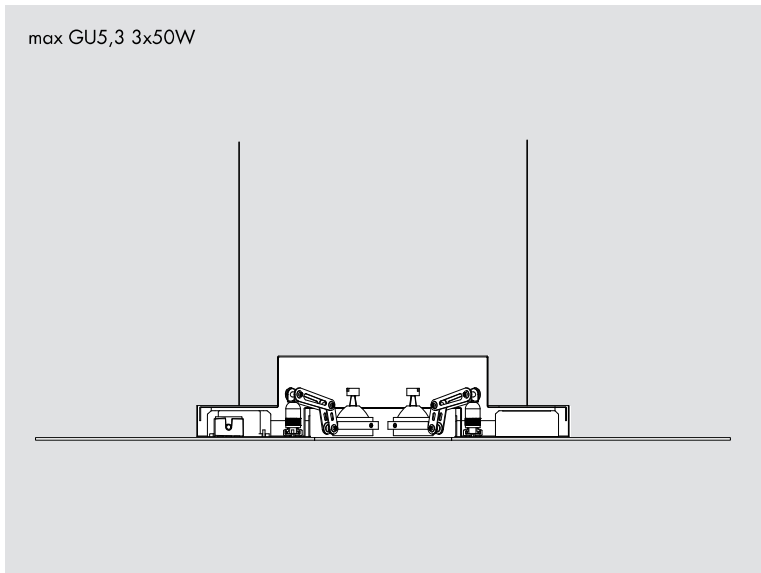


h	d1	d2	Em	Emax
1m	0,2	0,2	9901	14001
2m	0,4	0,4	2477	3500
3m	0,5	0,5	1101	1556
4m	0,8	0,8	619	875





h	d1	d2	Em	Emax
1m	0,4	0,4	2975	4400
2m	0,6	0,6	744	1100
3m	1	1	331	489
4m	1,2	1,2	186	275



h	d1	d2	Em	Emax
1m	0,7	0,7	950	2135
2m	1,3	1,3	237	534
3m	2	2	106	237
4m	2,7	2,7	59	133



h	d1	d2	Em	Emax
1m	1,2	1,2	713	1100
2m	2,4	2,4	178	275
3m	3,4	3,4	79	122
4m	4,6	4,6	45	69

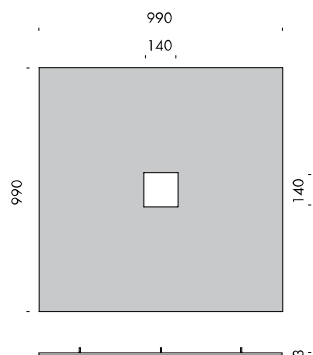

componenti. components.		CE	i
-------------------------	--	----	---

F9.007.11	piastra inferiore bianco white lower plate	12,6	
F9.007.12	piastra inferiore alluminio lucido polished aluminium lower plate	12,6	
F9.007.13	piastra inferiore cartongesso lower plate plasterboard made with 094 system	28,45	
F9.007.14	piastra inferiore nero black lower plate	12,6	

accessori. accessories.		CE	i
-------------------------	--	----	---

F9.007.21	rosone inox lucido 7 poli canopy polished stainless steel 7 circuits	0,3	
------------------	---	-----	--

distanza minima tra corpo illuminante e soffitto: 500mm
distanza massima tra corpo illuminante e soffitto: 3000mm
- minimum distance between lighting fixture and ceiling: 500mm
maximum distance between lighting fixture and ceiling: 3000mm

