

NEW EVOLUTION IN HOME CONTROL

NEVO[®] CONNECT

NevoConnect NC-50 is Versatile.

FEATURES

- 6 addressable 3.5mm multi-purpose ports capable of IR, or one-way RS-232, sensing
- Reliable and robust 2-way RF (Z-Wave)[®]
- Simple programming and set-up with NevoStudio Pro software
- 4 front panel IR blasters for a 180 degrees of coverage
- Status LEDs to show individual port activity

Exceptional Technical Support


Extensive Training Offering

Profitable Dealer Programs



NevoConnect NC-50 SPECIFICATIONS

Communication Ports	2-way RF (Z-Wave) 6 addressable, programmable rear panel ports, 3.5mm Each capable of: IR output Serial output, 1-way Sensing input, voltage and video
Internal IR Housing Lens	4 front panel IR blasters with 180 degree field of view Painted ABS Polycarbonate
Mounting	Wallmount or free-standing
Power Supply	9VDC 500mA
Dimensions	6.3 x 3.7 x 1.6 inches (LxWxH) 160 x 93 x 41 mm (LxWxH)
Weight	0.4 lbs / 6.4 Oz / 181 g
Certifications	FCC, CE, C-TICK, RoHS, IC, Z-Wave
Model No.	North America 1037 Europe 1050 Australia 1050-0301
RF Frequency	North America 908.42 MHz Europe 868.42 MHz Australia 921.42 Mhz

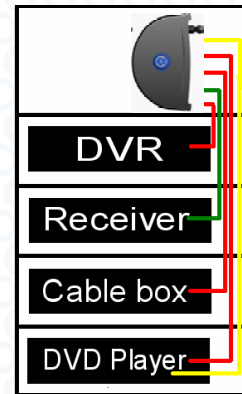

NevoConnect NC-50 PACKAGING CONTENTS

- NevoConnect NC-50
- Power Supply
- Adjustable / removable antenna
- 9VDC power supply
- Manual

- = IR
- = Video or Power Sensing
- = Serial (RS-232) control



NevoS70



NevoQ50



NevoConnect NC-50



NevoConnect Accessories

Notice: Nevo, NevoStudio Pro, are trademarks of Universal Electronics Inc. in the United States and/or other countries in the world.

Universal Electronics Inc : 6101 Gateway Drive, Cypress, CA 90630-4841, U.S.A. 1-714-820-1000
 Universal Electronics BV: Institutenweg 21, 7521 PH Enschede, The Netherlands +31-53-488-8000

www.mynevo.com
www.uei.com

All Rights Reserved. The information and specifications are subject to change without notice.

